



T1: Sunny (10 pts)

You are asked to study the features of the brightly lit circle and dark rings in the figures below. Make your calculations for an idealized situation: the chair leg is strictly cylindrical of radius a, strictly vertical, with a perfectly smooth, cylindrical, and perfectly reflecting surface. You may make any additional model assumptions and approximations you deem reasonable that will simplify your calculations.

a) (5 pts) Determine how the illuminance surplus $I(r,\theta)$ inside the brightly lit circle on the floor depends on the polar coordinates $r\gg a$ and θ . The illuminance quantifies the amount of incoming light per area. By "surplus" we mean the additional illuminance introduced due to the presence of the cylinder. Express the answer in terms of I_0 defined as the illuminance difference between points A and B in the figure.

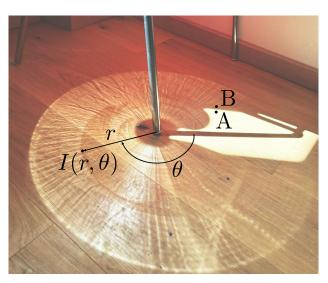

b) (5 pts) In the following figure some fingers are blocking some of the light from reaching the chair leg. Let $R(\theta)$ denote the radial distance of the middle dark ring as a function of the angle θ and let R_{\min} be the minimal value of $R(\theta)$. Determine $R(\theta) - R_{\min}$.

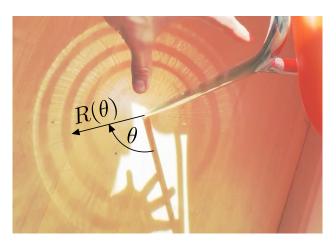


T2: Floating table (10 pts)

A table is made by fastening a metal frame to a massive uniform plate (so they form a rigid body) and attaching it with chains to another frame that is fixed on the horizontal ground. The motion of the table is limited to the plane of the side view (right picture).

- a) (4 pts) Show that in the configuration on the side view, the table is in a stable equilibrium.
- b) (6 pts) Find the period *T* of the small oscillations.

The masses of the chains and the frame can be neglected. The chains are frictionless, inextensible, and remain tensioned in oscillations. The grid step is $a = 0.100 \,\mathrm{m}$, the acceleration of gravity $g = 9.81 \,\mathrm{m/s^2}$.

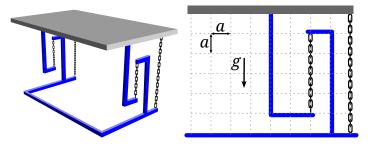

T3: Crossed wires (10 pts)

- a) (1 pt) Current flows through an infinite, straight, thin wire. There is an externally imposed, uniform magnetic field directed parallel to the wire. Qualitatively sketch one of the magnetic field lines.
- b) (5 pts) Now consider two infinite, straight, thin wires (wires X and Y), each carrying a current I as shown in the figure. The x-axis coincides with wire X, while wire Y is parallel to the y-axis and passes through the point (0,0,-a). Let P be the point (3a,0,r). Assuming $r \ll a$, calculate d, the distance of closest approach of the magnetic field line that passes through P to the wire X.
- c) (4 pts) Let L be the length of this field line between P and its point of closest approach to wire X. Using values $a = 10 \, \mathrm{cm}$ and $r = 1.0 \, \mathrm{mm}$, calculate L to within 20% relative error.

